

Tempower Limited


Extra Heavy Duty 3 Channel Cable Protectors with T-shaped Connectors

Ideal for public, commercial, heavy trucks and forklifts in industrial areas.



Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Ideal for heavy trucks and forklifts in industrial environments, such as construction sites, where extra heavy duty cable protection is required due to constant heavy truck and vehicle traffic. We also offer ADA compliant cable covers and bridges to fit these cable protectors.

Features







- **LOAD CAPACITY: 14,210 lbs/tyre (28,420 lbs/axle)**
- Protects cables and hose lines up to 2.25 in. in diameter.
- All weather polyurethane construction with heavy load capacity.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, setup, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols moulded into lid surface.
- End caps provide gradual taper to ground or floor.
- 45° left and right hand turns allow for additional configuration options.
- Join left and right turns to create a jog (see picture below).

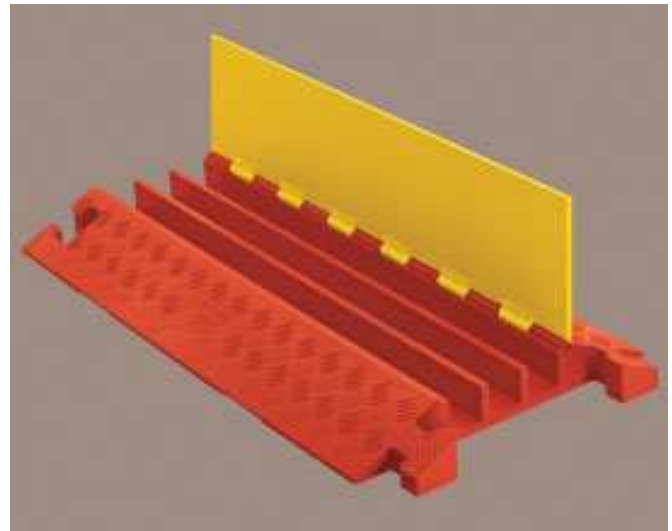

3 Channel Ramp

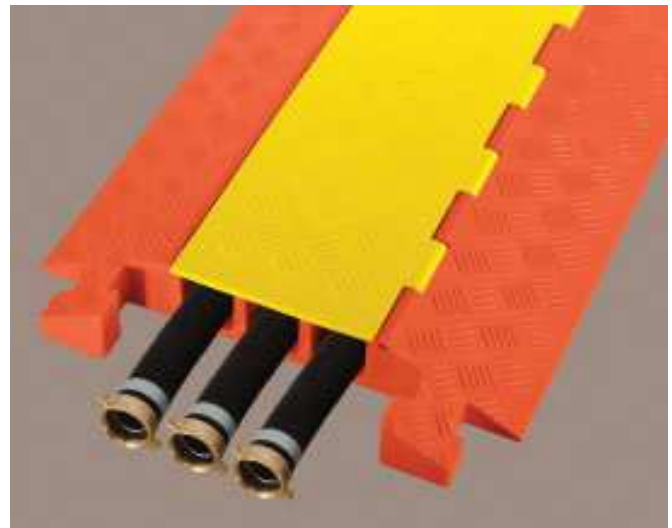

Extra Heavy Duty 3 Channel Ramp

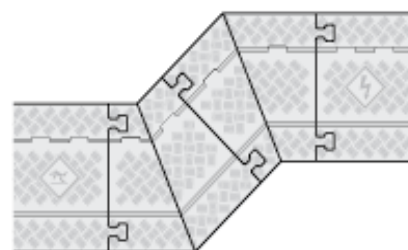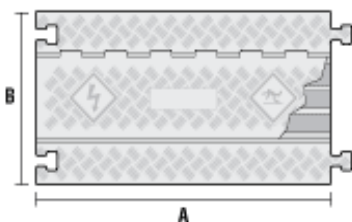

Join left and right turn to create a jog

45 degree turns allow for additional configuration options for 3-channel systems

Tempower Limited

SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)
Hinge Pin Material	Reinforced fibreglass
Safety Symbols	Per ANSI. Z535.3-1991

LOAD CAPACITY PER TYRE/AXLE

3 Channels	Max Load at 70°F (21°C)
Per Tyre	14,210 lbs. (6,446 kg)
Per Axle	28,420 lbs. (12,892 kg)

WARNINGS



Symbols
Moulded into Lid



MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	F WEIGHT
CP3X225-Y/O	3-Channel Protector Yellow Lid Orange Ramp	36 in. (914.4 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	28 lbs. (12.7 kg)
CPEC3X225-O (Pair Only)	3-Channel End Caps (female) Orange (male) Orange	8.25 in. (209.6 mm) 6 in. (152.4 mm)	20 in. (508 mm) 20 in. (508 mm)	3.05 in. (77.5 mm) 3.05 in. (77.5 mm)	2.25 in. (57.2 mm) 2.25 in. (57.2 mm)	2.25 in. (57.2 mm) 2.25 in. (57.2 mm)	8 lbs. (3.6 kg)
CPT3X225-R-Y/O	5-Channel 45° Right Turn Yellow Lid Orange Ramp	25 in. (635 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	15 lbs. (6.8 kg)
CPT3X225-L-Y/O	3-Channel 45° Left Turn Yellow Lid Orange Ramp	25 in. (635 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	15 lbs. (6.8 kg)

