

Tempower Limited


Heavy Duty 3 Channel Cable Protectors with Dog-Bone Connectors

Ideal for public, commercial, and industrial areas.


The fast and easy way to guard and protect valuable electrical cables and hose lines from damage and abuse while providing a method of safe crossing for constant vehicle and pedestrian traffic. Each cable/hose line is separated and organized in its own protective channel to ensure safety. Ideal for use in amusement parks, entertainment venues, sporting events, and in most public, commercial, industrial, construction, and utility applications.

Features

- **LOAD CAPACITY: 14,210 lbs/tyre (28,420 lbs/axle)**
- Protects cables and hose lines up to 2.25 in. in diameter.
- All weather polyurethane construction with heavy load capacity.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty Dog-Bone connector interlocks modular sections.
- Lightweight and easy to transport, setup, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols moulded into lid surface.

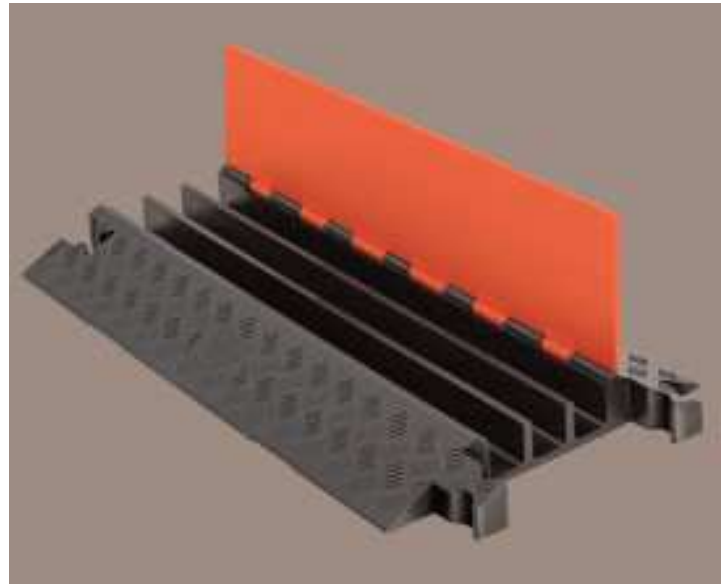

3 Channel Ramp

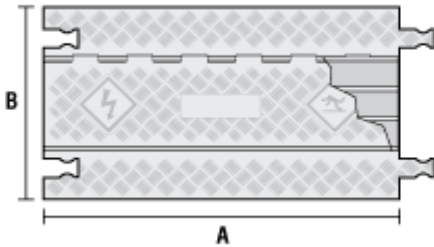

SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)
Hinge Pin Material	Reinforced fibreglass
Safety Symbols	Per ANSI. Z535.3-1991

LOAD CAPACITY PER TYRE/AXLE

3 Channels	Max Load at 70°F (21°C)
Per Tyre	14,210 lbs. (6,446 kg)
Per Axle	28,420 lbs. (12,892 kg)

WARNINGS



Symbols Moulded into Lid



MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	F WEIGHT
GD3X225-O/B	3 Channel Protector Orange Lid/Black Ramp	36 in. (914.4 mm)	20.0 in. (510 mm)	3.0 in. (76.5 mm)	2.25 in. (58.0 mm)	2.25 in. (58.0 mm)	30 lbs. (13.6 kg)