

Tempower Limited


Heavy Duty 5 Channel Cable Protectors with Dog-Bone Connectors

Ideal for public, commercial, and industrial areas.










The fast and easy way to guard and protect valuable electrical cables and hose lines from damage and abuse while providing a method of safe crossing for constant vehicle and pedestrian traffic. Each cable/hose line is separated and organized in its own protective channel to ensure safety. Ideal for use in amusement parks, entertainment venues, sporting events, and in most public, commercial, industrial, construction, and utility applications. Optional Anti-Slip Rubber Pad Kit available for added traction on smooth surfaces.

Features

- **LOAD CAPACITY: 10,500 lbs/tyre (21,000 lbs/axle)**
- Protects cables and hose lines up to 1.3 in. in diameter.
- All weather polyurethane construction with heavy load capacity.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty Dog-Bone connector interlocks modular sections.
- Lightweight and easy to transport, setup, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols moulded into lid surface.
- NEW - Through holes added for fastening protector down.
- NEW - Smooth area added for adhering a barcode label or RFID tag.
- NEW - Pry slots added underneath for easy removal when fastened down.
- End caps provide gradual taper to ground or floor.
- 4-Way Cross allows you to split or join cable runs.
- 45° left and right hand turns allow for additional configuration options.
- Join left and right turns to create a jog (see illustration below).
- Increase traction on smooth surfaces with optional anti-slip rubber pads.

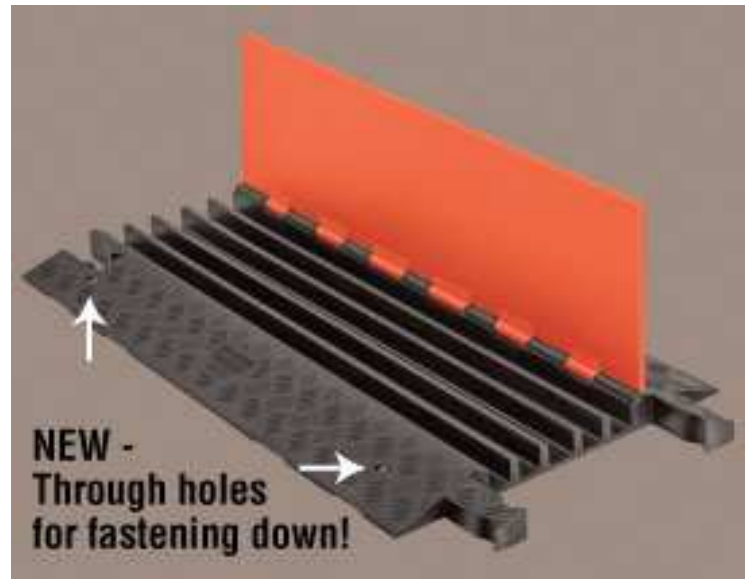

5 Channel Ramp

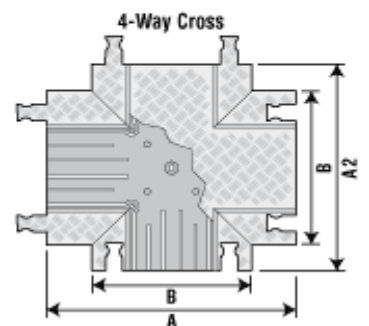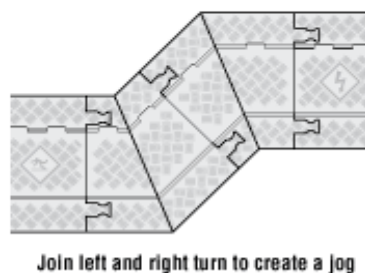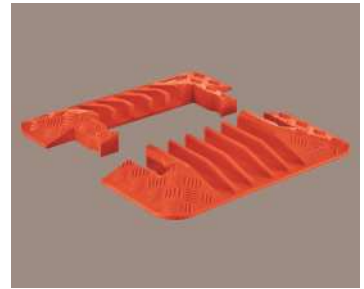

45 degree turns and 4-way cross allow for additional configuration options for 5-channel systems



Tempower Limited

| SPECIFICATION DATA | |
|--------------------|--------------------------------|
| Material | Polyurethane (UV stabilized) |
| Operating Temp | 40°F to 120°F (-40°C to 48° C) |
| Hinge Pin Material | Reinforced fibreglass |
| Safety Symbols | Per ANSI. Z535.3-1991 |

| LOAD CAPACITY PER TYRE/AXLE | |
|-----------------------------|-------------------------|
| 5 Channels | Max Load at 70°F (21°C) |
| Per Tyre | 23,000 lbs. (5,896 kg) |
| Per Axle | 46,000 lbs. (11,792 kg) |

WARNINGS

Symbols Moulded into Lid

| MODEL | DESCRIPTION & COLOUR | A LENGTH | B WIDTH | C HEIGHT | D CHANNEL WIDTH | E CHANNEL HEIGHT | F WEIGHT |
|----------------|---|------------------------|-------------------------|-----------------------|-----------------------|------------------------|---------------------|
| GD5X125-O/B | 5 Channel Protector Orange Lid Black Ramp | 36 in. (914.4 mm) | 19.75 in. (501.7 mm) | 1.87 in. (47.6 mm) | .33 in. (34.0 mm)) | 1.32 in. (33.65 mm) | 21 lbs. (9 kg) |
| GD5X125-B/B | 5 Channel Protector Black Lid Black Ramp | 36 in. (914.4 mm) | 19.75 in. (501.7 mm) | 1.87 in. (47.6 mm) | .33 in. (34.0 mm)) | 1.32 in. (33.65 mm) | 21 lbs. (9 kg) |
| GDT5X125-R-O/B | 5 Channel 45° Right Turn Orange Lid Black Ramp | 24.5 in. (622.3 mm) | 19.75 in. (501.7 mm) | 1.87 in. (47.6 mm) | 1.33 in. (34.0 mm) | 1.32 in. (33.65 mm) | 11 lbs. (5.0 kg) |
| GDT5X125-L-O/B | 5 Channel 45° Left Turn Orange Lid Black Ramp | 24.5 in. (622.3 mm) | 19.75 in. (501.7 mm) | 1.87 in. (47.6 mm) | 1.33 in. (34.0 mm) | 1.32 in. (33.65 mm) | 11 lbs. (5.0 kg) |