

Tempower Limited

ADA Ramps and Rails for select

Ideal for public, commercial, and industrial areas.


ADA Compliant Ramps and Rails feature a gentle slope and slip resistant ramps to provide a safe crossing point for wheelchairs, carts and vehicles with small wheels. While these ramps and rails are the perfect solution for making events ADA compliant, they still allow users to have access to their cables and cords as needed. These ramps and rails can also be used in conjunction with protector ramps..

Features


- **LOAD CAPACITY: 20,105 lbs/tyre (40,300 lbs/axle)**
- Compatible with select Cable Protectors.
- Fits existing cable protectors Lightweight, 36" wide, modular ADA compliant ramps.
- Quick attachment to one or multiple cable protectors.
- Still allows easy accessibility to cables and cords.
- Side rails provide ADA compliant edge protection.
- Add ramps and rails whenever requirements specify.
- One person installation - no tools required.



ADA Ramp

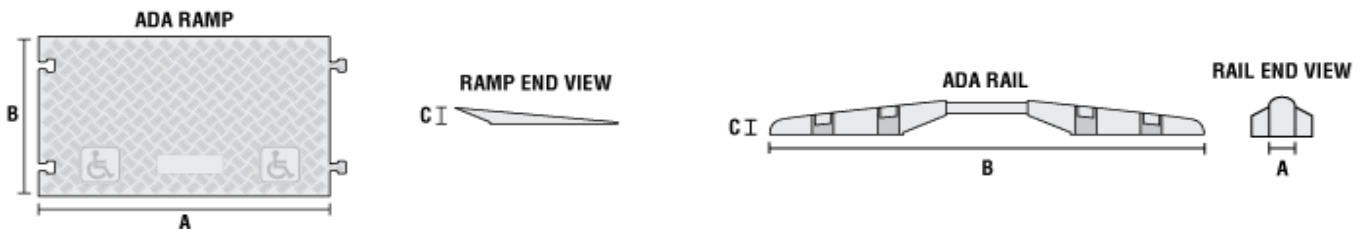

MODULAR COMPONENTS ALLOW YOU TO CREATE AN ADA SYSTEM OF ANY LENGTH

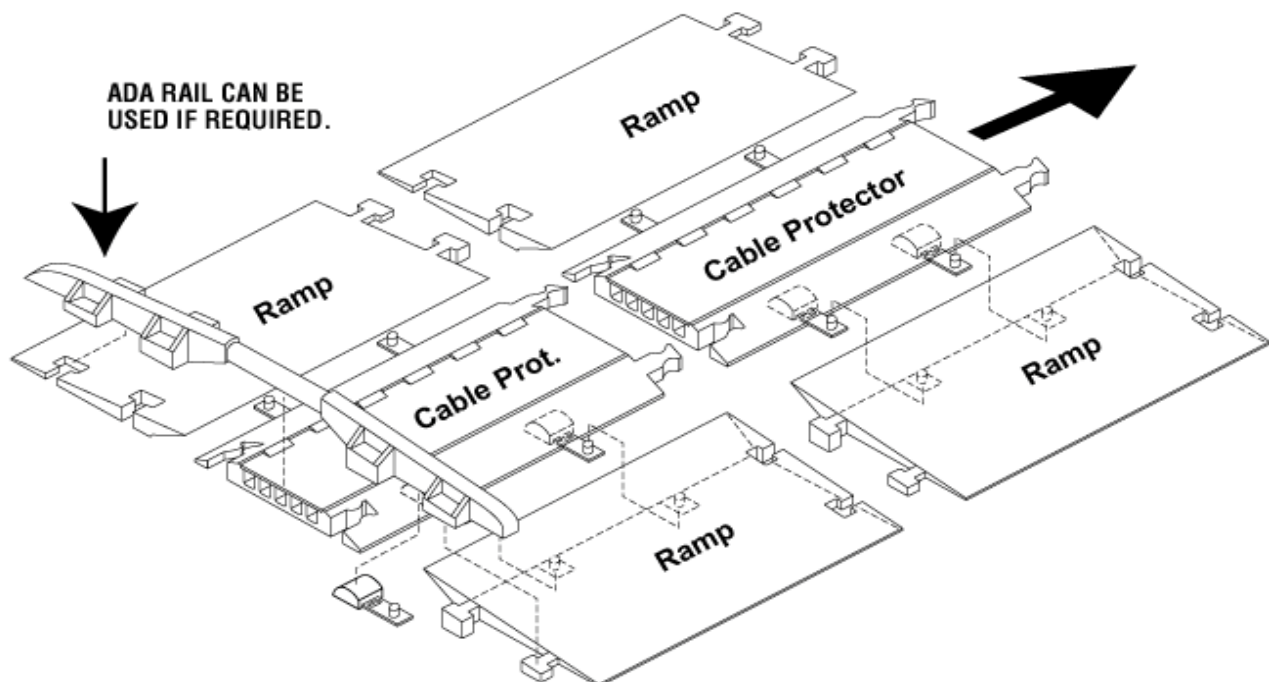

Tempower Limited

SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)

LOAD CAPACITY PER TYRE/AXLE

5 Channels	Max Load at 70°F (21°C)
Per Tyre	20,150 lbs. (9,140 kg)
Per Axle	40,300 lbs. (18,280 kg)



ADA Compliant Symbols
Moulded into Each Ramp
WARNINGS

MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	F WEIGHT
CPRP-5GD-BLU (Pair)	Ramps for GD5X125 (2 Ramps & 4 Connectors) Blue	36 in. (914.4 mm)	21.88 in. (555.75 mm)	2 in. (50.8 mm)	40.00 lbs. (18.1 kg)
CPRL-5GD-Y (Each)	Rail for Guard Dog CPRP-5GD Yellow	2 in. (50.8 mm)	55.5 in. (1409.7 mm)	2 in. (50.8 mm)	12.75 lbs. (5.8 kg)
CPRP-3GD-BLU (Pair)	Ramps for Guard Dog GD3X225 (2 Ramps & 4 Connectors) Blue	36 in. (914.4 mm)	34.81 in. (884.2 mm)	2.88 in. (73.2 mm)	66 lbs. (30.0 kg)