


## Extra Heavy Duty 3 Channel Cable Protectors with T-shaped Connectors

### Ideal for public, commercial, heavy trucks and forklifts in industrial areas




Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Ideal for heavy trucks and forklifts in industrial environments, such as construction sites, where extra heavy duty cable protection is required due to constant heavy truck and vehicle traffic. We also offer ADA compliant cable covers and bridges to fit these cable protectors.

### Features





- **LOAD CAPACITY: 14,210 lbs/tyre (28,420 lbs/axle).**
- **Protects cables and hose lines up to 2.25 in. in diameter.**
- **All weather polyurethane construction with heavy load capacity.**
- **Hinged lid makes placing and removing cables and hose lines easy.**
- **Patented 5-bar tread surface provides maximum traction.**
- **Heavy duty T-shaped connector interlocks modular sections.**
- **Lightweight and easy to transport, setup, disassemble and store.**
- **Carrying handle is conveniently recessed on underside of protector.**
- **Safety warning symbols moulded into lid surface.**
- **End caps provide gradual taper to ground or floor.**
- **45° left and right hand turns allow for additional configuration options.**
- **Join left and right turns to create a jog (see picture below).**

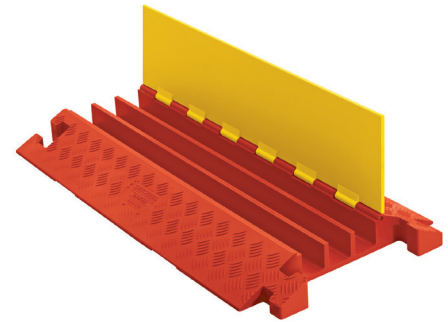

3 Channel Ramp

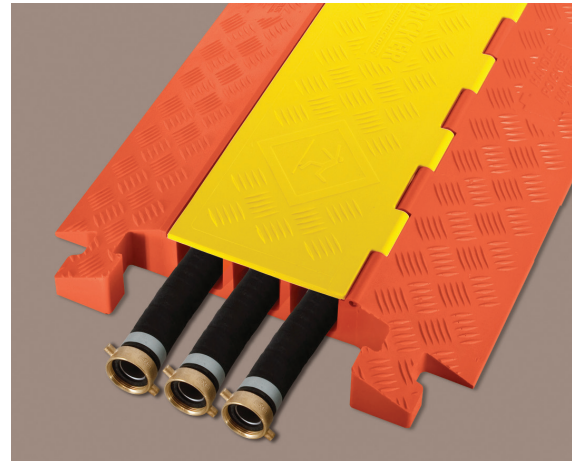

### Extra Heavy Duty 3 Channel Ramp



Join left and right turn to create a jog

45 degree turns allow for additional configuration options for 3-channel systems

## Extra Heavy Duty 3 Channel Cable Protectors with T-shaped Connectors

### Specification Data

Material	<b>Polyurethane (UV stabilized)</b>
Operating Temp	<b>40°F to 120°F (-40°C to 48°C)</b>
Hinge Pin Material	<b>Reinforced fibreglass</b>
Safety Symbols	<b>Per ANSI. Z535.3-1991</b>

### Load Capacity Per Tyre/Axle

<b>3 Channels</b>	<b>Max Load at 70°F (21°C)</b>
Per Tyre	<b>14,210lbs (6,446kg)</b>
Per Axle	<b>28,420lbs (12,892kg)</b>

### Warnings

Symbols Moulded into Lid

Model	Description & Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	F Weight
<b>CP3X225 -Y/O</b>	<b>3-Channel Protector Yellow Lid Orange Ramp</b>	<b>36inch (914.4mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>28lbs (12.7kg)</b>
<b>CPEC3X225 -0 (Pair Only)</b>	<b>3-Channel End Caps (female) Orange (male) Orange</b>	<b>8.25inch (209.6mm) 6inch (152.4mm)</b>	<b>20inch (508mm) 20inch (508mm)</b>	<b>3.05inch (77.5mm) 3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm) 2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm) 2.25inch (57.2mm)</b>	<b>8lbs (3.6kg)</b>
<b>CPT3X225 -R-Y/O</b>	<b>5-Channel 45° Right Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>15lbs (6.8kg)</b>
<b>CPT3X225 -L-Y/O</b>	<b>3-Channel 45° Left Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>15lbs (6.8kg)</b>

