

## Extra Heavy Duty 5 Channel Cable Protectors with T-shaped Connectors



### Ideal for heavy trucks and forklifts in industrial areas.

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Ideal for heavy trucks and forklifts in industrial environments, such as construction sites, where extra heavy duty cable protection is required due to constant heavy truck and vehicle traffic. We also offer ADA compliant cable covers and bridges to fit these cable protectors.

Protects cables and lines with an outside diameter up to 1.25 inches.  
End caps and 45° right & left turns available.

### Features


- **LOAD CAPACITY: 20,150 lbs/tyre (40,300 lbs/axle).**
- Protects cables and hose lines up to 1.25 in. in diameter.
- All weather polyurethane construction with heavy load capacity.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, setup, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols moulded into lid surface.
- End caps provide gradual taper to ground or floor.
- 45° left and right hand turns allow for additional configuration options.
- Join left and right turns to create a jog (see illustration below).

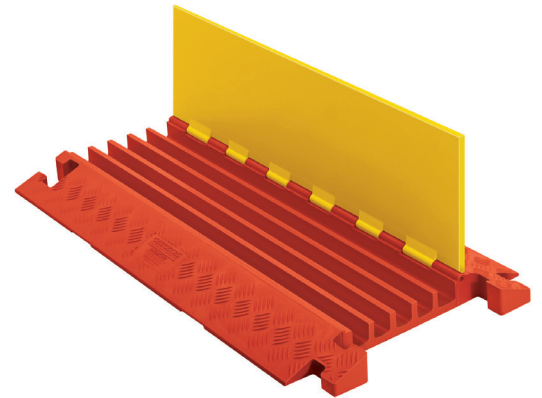

Features T-shaped Connectors




In-Use









45 Right Turn



45 left Turn



End caps

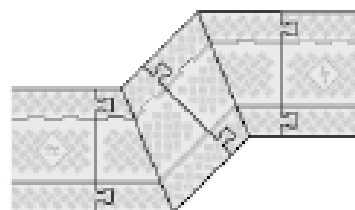

Join left and right turn to create a jog

45 degree turns allow for additional configuration options for 5-channel systems

## Extra Heavy Duty 5 Channel Cable Protectors with T-shaped Connectors

### Specification Data

Material	<b>Polyurethane (UV stabilized)</b>
Operating Temp	<b>40°F to 120°F (-40°C to 48°C)</b>
Hinge Pin Material	<b>Reinforced fibreglass</b>
Safety Symbols	<b>Per ANSI. Z535.3-1991</b>

### Load Capacity Per Tyre/Axle

<b>5 Channels</b>	<b>Max Load at 70°F (21°C)</b>
Per Tyre	<b>20,150lbs (9,140kg)</b>
Per Axle	<b>40,300lbs (18,280kg)</b>

### Warnings

Symbols Moulded into Lid

Model	Description & Colour	A Length	B Width	C Height	D Chanel Width	E Chanel Height	F Weight
<b>CP5X125 -Y/O</b>	<b>5 Channel Protector Yellow Lid Orange Ramp</b>	<b>36inch (914.4mm)</b>	<b>20inch (508mm)</b>	<b>2.31inch (57.2mm)</b>	<b>1.25inch (31.8mm)</b>	<b>1.25inch (31.8mm)</b>	<b>25lbs (11.3kg)</b>
<b>CPEC5X125 -0 (Pair Only)</b>	<b>5 Channel End Caps (Female) Orange (Male) Orange</b>	<b>7.5inch (190.5mm) 5.25inch (133.4mm)</b>	<b>20inch (508mm) 20inch (508mm)</b>	<b>2.31inch (57.2mm) 2.31inch (57.2mm)</b>	<b>1.25inch (31.8mm) 1.25inch (31.8mm)</b>	<b>1.25inch (31.8mm) 1.25inch (31.8mm)</b>	<b>7lbs (3.2kg) 7lbs (3.2kg)</b>
<b>CPT5X125 -R-Y/O</b>	<b>5 Channel 45° Right Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>2.31inch (57.2mm)</b>	<b>1.25inch (31.8mm)</b>	<b>1.25inch (31.8mm)</b>	<b>13lbs (5.9kg)</b>
<b>CPT5X125 -L-Y/O</b>	<b>5 Channel 45° Left Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>2.31inch (57.2mm)</b>	<b>1.25inch (31.8mm)</b>	<b>1.25inch (31.8mm)</b>	<b>13lbs (5.9kg)</b>

### Specification Data

Material	<b>Polyurethane (UV stabilized)</b>
Operating Temp	<b>40°F to 120°F (-40°C to 48°C)</b>
Hinge Pin Material	<b>Reinforced fibreglass</b>
Safety Symbols	<b>Per ANSI. Z535.3-1991</b>

### Load Capacity Per Tyre/Axle

<b>3 Channels</b>	<b>Max Load at 70°F (21°C)</b>
Per Tyre	<b>14,210lbs (6,446kg)</b>
Per Axle	<b>28,420lbs (12,892kg)</b>

### Warnings

Symbols Moulded into Lid

Model	Description & Colour	A Length	B Width	C Height	D Chanel Width	E Chanel Height	F Weight
<b>CP3X225 -Y/O</b>	<b>3 Channel Protector Yellow Lid Orange Ramp</b>	<b>36inch (914.4mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>28lbs (12.7kg)</b>
<b>CPEC3X225 -0 (Pair Only)</b>	<b>3 Channel End Caps (Female) Orange (Male) Orange</b>	<b>8.25inch (209.6mm) 6inch (152.4mm)</b>	<b>20inch (508mm) 20inch (508mm)</b>	<b>3.05inch (77.5mm) 3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm) 2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm) 2.25inch (57.2mm)</b>	<b>8lbs (3.6kg) 8lbs (3.6kg)</b>
<b>CPT3X225 -R-Y/O</b>	<b>3 Channel 45° Right Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>15lbs (6.8kg)</b>
<b>CPT3X225 -L-Y/O</b>	<b>3 Channel 45° Left Turn Yellow Lid Orange Ramp</b>	<b>25inch (635mm)</b>	<b>20inch (508mm)</b>	<b>3.05inch (77.5mm)</b>	<b>2.25inch (57.2mm)</b>	<b>2.25inch (57.2mm)</b>	<b>15lbs (6.8kg)</b>