

Tempower Limited


1 Channel Drop Over Cable Protectors with L-shaped connectors

Ideal for public, commercial, and industrial areas.



FastLane Drop Over Protectors are made from durable polyurethane and feature heavy duty "L" shape connectors for easily attaching additional protectors as required. Patented 5-bar tread plate surface provides maximum traction for pedestrian traffic. These low profile protectors are compact for easy setup, disassembly, and storage. Optional Anti-Slip Rubber Pad Kit and/or Optional Carpet Kit with VELCRO® Brand Fasteners also available for added traction

Features

- Large size protects cables and cords up to 1 in. in diameter.
- Small size protects cables and cords up to .5 in. in diameter.
- For lightweight vehicles and pedestrian traffic.
- All weather polyurethane construction for moderate load capacity.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty L-shaped connector interlocks modular sections.
- Increase traction with optional Carpet Kit with VELCRO® Brand Fasteners and/or anti-slip rubber pads for smooth surfaces.
- Lightweight, modular design for easy setup, disassembly, and storage.
- Safety warning symbols moulded into protector surface.

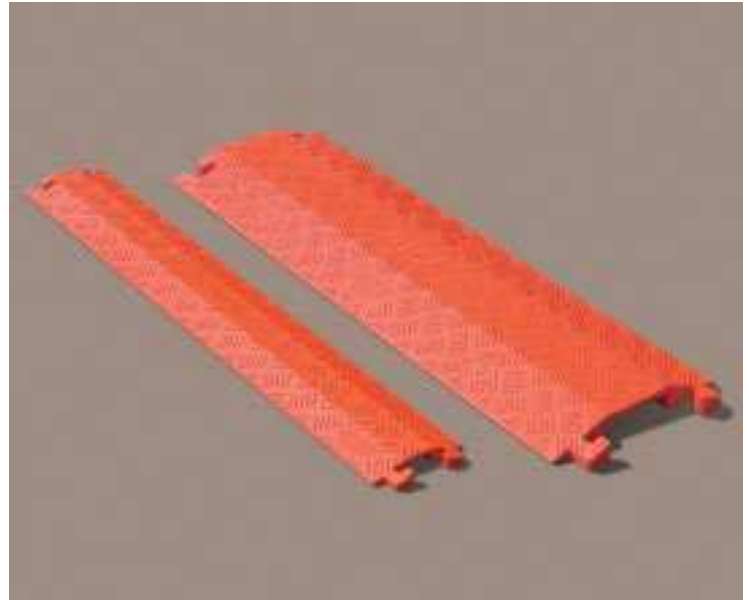

1 Channel Drop Over Ramp

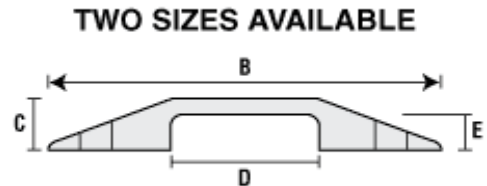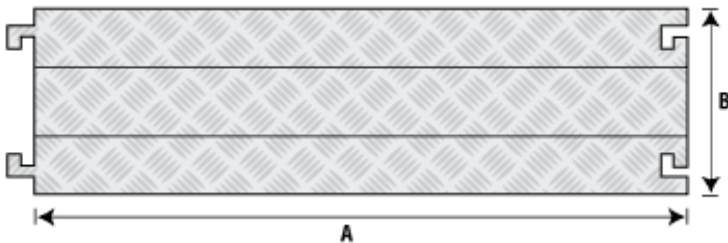

TWO SIZES AVAILABLE

SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)
Hinge Pin Material	Reinforced fibreglass

LOAD CAPACITY PER TYRE/AXLE

1 Channel Max Load at 70°F (21°C) Per	
Tyre	1,050 lbs. (476 kg)
Per Axle	2,100 lbs. (952 kg)

WARNINGS



Symbols Moulded into Lid



MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	F WEIGHT
FL1X1.5- O / B	Drop Over Protector 1 Channel (1.5 in. x .5 in.) Orange or Black	36 in. (914.4 mm)	5.25 in. (133 mm)	.75 in. (19 mm)	1.5 in. (38 mm)	.5 in. (12.7 mm)	3 lbs. (1.4 kg)
FL1X4- O / B	Drop Over Protector 1 Channel (4 in. x 1 in.) Orange or Black	36 in. (914.4 mm)	10.75 in. (273 mm)	1.50 in. (38 mm)	4 in. (101.6 mm)	1 in. (25.4 mm)	8 lbs. (3.6 kg)