

# Tempower Limited


## 1 Channel Low Profile Cable Protectors

### Ideal for public, commercial, and industrial areas.



Heavy duty low profile Cable Protectors are ideal for stage, studio, and broadcast applications. They provide a safe and easy crossing for vehicle and pedestrian traffic and are perfect for valuable electrical and delicate multi-media electronic cables. These low profile protectors with Dog-Bone connectors feature Standard ramps (also available with low angle ADA compliant ramp). Single channel allows cable/hose lines to be separated in their own protective channel while ramps allow effortless crossing. These low profile protectors are compact for easy setup, disassembly, and storage. Optional Anti-Slip Rubber Pad Kit and/or Carpet Kit also available for added traction. Protects cables and lines with an outside diameter up to 0.75 inches.

### Features



- **LOAD CAPACITY: 13,000 lbs/tyre (26,000 lbs/axle)**
- Low profile design - only 1.25 " high
- ADA Compliant ramps
- Heavy duty "Dog Bone" connectors
- Hinged lid for easy cable placement
- Polyurethane construction
- High load-bearing capacity
- Satisfies state and federal regulatory agencies
- 5-Bar tread plate surface for maximum traction
- Safety warning symbols moulded into lid
- Modular interlocking design is easy to setup, disassemble, and store
- Universal safety colours for high visibility

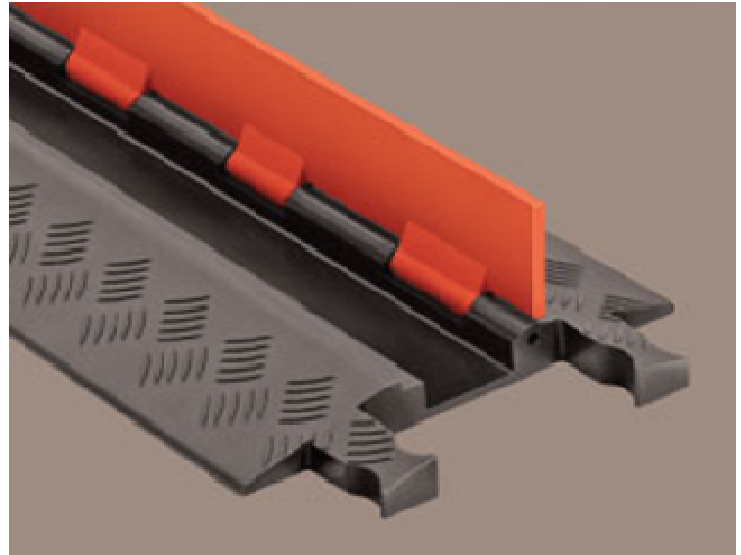

1 Channel Ramp

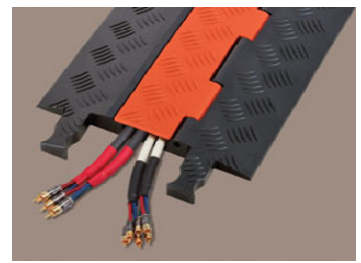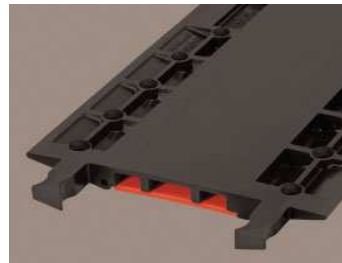

Low profile design is only 1.25" high with .75" channel height!

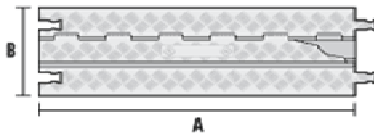

### SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)
Hinge Pin Material	Reinforced fibreglass
Safety Symbols	Per ANSI. Z535.3-1991

### LOAD CAPACITY PER TYRE/AXLE

<b>1 Channel</b>	<b>Max Load at 70°F (21°C)</b>
Per Tyre	13,000 lbs. (5,896 kg)
Per Axle	26,000 lbs. (11,792 kg)

### WARNINGS



Symbols Moulded into Lid



MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	F WEIGHT
GD1X75-ST-O/B	1-Channel Low Profile Cable Protector with Standard Ramps Orange Lid Black Ramps	36 in. (914.4 mm)	10.81 in. (274.6 mm)	3 in. (76.5 mm)	2.25 in. (57.2 mm)	.75 in. (19 mm)	7.8 lbs. (3.54 kg)
GD1X75-ST-B/B	1-Channel Low Profile Cable Protector with Standard Ramps Black Lid Black Ramps	36 in. (914.4 mm)	10.81 in. (274.6 mm)	3 in. (76.5 mm)	2.25 in. (57.2 mm)	.75 in. (19 mm)	7.8 lbs. (3.54 kg)