

Tempower Limited


Extra Heavy Duty 2 Channel Cable Protectors with T-shaped Connectors

Ideal for public, commercial, heavy trucks and forklifts in industrial areas.

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Ideal for heavy trucks and forklifts in industrial environments, such as construction sites, where extra heavy duty cable protection is required due to constant heavy truck and vehicle traffic. We also offer ADA compliant cable covers and bridges to fit these cable protectors.


Features

- **LOAD CAPACITY: 10,880 lbs/tyre (21,760 lbs/axle)**
- Protects cables and hose lines up to 3.25 in. in diameter.
- All weather polyurethane construction with heavy load capacity.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, setup, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols moulded into lid surface.

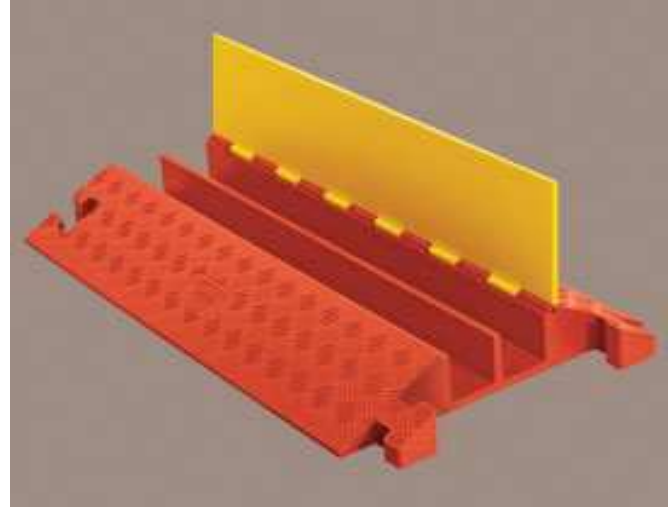

2 Channel Ramp

Extra Heavy Duty 2 Channel Ramp

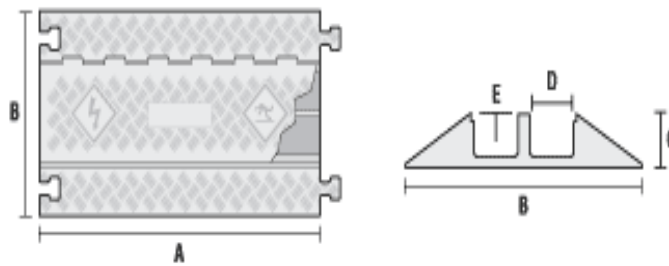

SPECIFICATION DATA

Material	Polyurethane (UV stabilized)
Operating Temp	40°F to 120°F (-40°C to 48° C)
Hinge Pin Material	Reinforced fibreglass
Safety Symbols	Per ANSI. Z535.3-1991

LOAD CAPACITY PER TYRE/AXLE

2 Channels	Max Load at 70°F (21°C)
Per Tyre	10,880 lbs. (6,446 kg)
Per Axle	21,760 lbs. (9,870 kg)

WARNINGS



Symbols Moulded into Lid



MODEL	DESCRIPTION & COLOUR	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	F WEIGHT
CP2X325-Y/O	2-Channel Protector Yellow Lid Orange Ramp	36 in. (914.4 mm)	22.0 in. (558.8 mm)	4.13 in. (101.6 mm)	3.25 in. (82.6 mm)	3.25 in. (82.6 mm)	303lbs. (15.0 kg)