


Power Distribution Unit

PL57

Application and Operational Considerations

Application: Considered application of this Distribution Unit, is for connection from a 3ph 400V 400A max load supply, to downstream units requiring 400A Powerlock or 125A or 63A 3phase or 63A single phase connectivity to a maximum load of 400A combined from all output sockets, per phase. The outputs are balanced off each L1, L2 & L3 incoming phase.

Note: The total load drawn per phase should be checked for optimum balance of all phases, with minimal differences, and not exceed the stated amperage of connectivity on any of the output panel sockets. Unit should **NOT** run on continuous full load for long periods of time on any of the connections. Unit shall be installed and used by a competent Electrician whom shall ensure that application design, installation and testing is compliant with BS7671.

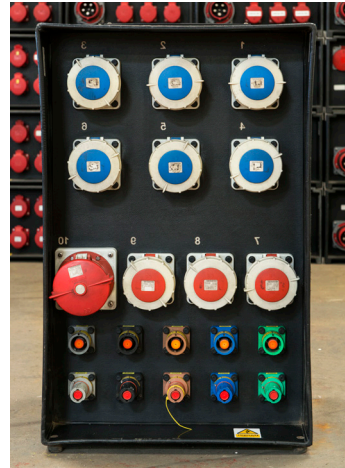

Unit Specification

Unit Standard:	BS EN 61439-3
Unit Guide Weight:	
Approx Dim: WxDxH	560x420x840
Enclosure (IP):	IP44
Impact (IK)	IK>06
Unit Max. Amps:	400A
Voltage (V):	400V
Frequency Hz:	50Hz
Short Circuit Rating:	6kA
Continuous Load:	70%

Supply Connection

Inlet Standard:	Powerlock
Amperage (A):	400
Voltage:	400
Connection:	3ph+N+E Powerlock Set

Supply Isolation

	N/A

Load Connection

Outlets Standard:	BS EN 60309-1+2
1ph Voltage:	230
3ph Voltage:	400

Connectivity

1x 125A Socket	3ph+N+E
3x 63A Sockets	3ph+N+E
3x 63A Sockets	L+N+E
Powerlock Source	3ph+N+E Set

Protection Devices

Device	Voltage	Rating Type & Amperage	Character - mA	kA - Short Circuit Rating	Device Standard(s)
1x MCB	400	C125		10	BS EN 60898
'+Shunt with VELR					
MCB to VELR		C0.5		10	BS EN 60898
3x MCB	400	C63		10	BS EN 60898
'+Shunt with VELR					
MCB to VELR		C0.5		10	BS EN 60898
6x MCBs		C63		6	BS EN 60898